





- STANDARD**
- Filtri di protezione vasca lavaggio
 - Wash tank surface Filter
 - Filtre de protection cuve de lavage
 - Schutzfilter des Washtanks
 - Filtro cuba

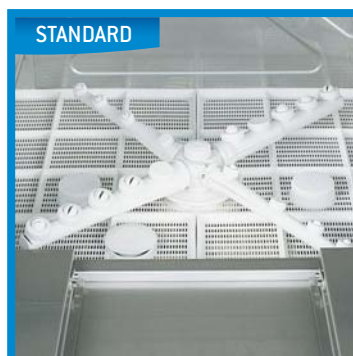

- OPTIONAL**
- Sistema ABS
 - Air Break System
 - Système Air Break
 - Air Break System
 - Sistema ABS

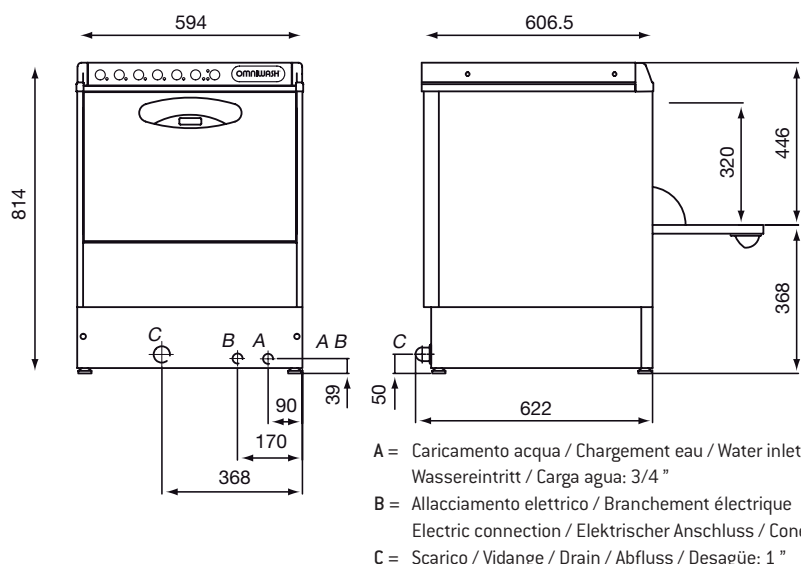

- OPTIONAL**
- Giranti e Filtri protezione vasca lavaggio in acciaio inox
 - Arms and wash tank surface filter in stainless steel
 - Bras et filtre de protection cuve de lavage en acier inox
 - Siebe und Washarme aus 1.4301 Chromnickelstahl
 - Toberas y filtro plano cuba en acero inox


- /h 1500
- /h 540
- 1x230 V
50 Hz
- 500x500 mm



- OPTIONAL**
- Dosatore Detersivo Peristaltico regolabile
 - Adjustable Peristaltic Soap Pump
 - Doseur de produit de lavage
 - Spülmitteldosierer, regulierbar
 - Dosificador de detergente regulable



- Pompa di scarico
- Drain pump
- Pompe de vidange
- Ablaufpumpe
- Bomba de desagüe



- Addolcitore acqua
- Internal water softener
- Adoucisseur incorporé
- Eingebauter Wasserenthärker
- Depurador incorporado

CARATTERISTICHE TECNICHE - TECHNICAL DATA - CARACTERISTIQUES TECHNIQUES - TECHNISCHE EIGENSCHAFTEN - CARACTERÍSTICAS TÉCNICAS

Alimentazione elettrica Electric supply Alimentation électrique Betriebsspannung Alimentación eléctrica	1x230 V/50Hz	Capacità vasca Wash tank capacity Capacité cuve Wanneninhalt Capacidad cuba	lt. 29	Pressione alimentazione Required water pressure Pression alimentation Wasserzulaufdruck Presión alimentación	bar 2 ÷ 4
Potenza pompa lavaggio Wash pump power Puissance pompe de lavage Pumpenleistung Potencia bomba lavado	Kw 0,75 (HP 1)	Capacità boiler Boiler capacity Capacité surchauffeur Boilerinhalt Capacidad boiler	lt. 6	Ø tubo di carico/scarico Water supply hose/drain hose Diamètre tuyau d'entrée/de vidange Einfülschlauch/Ablaufschlauch Ø tubo de carga/de desagüe	3/4" / 31,5
Resistenza boiler Boiler element Puissance résistance surchauffeur Heizleistung Boiler Potencia resistencia boiler	W 3000	Temperatura lavaggio/risciacquo Wash-rinse temperature Température lavage-rinçage Spül-Nachspültemperatur Temperatura lavado-aclarado	55° / 85°	Acqua alimentazione Supply water Eau d'alimentation Anschlussstemp Agua de alimentación	Max 50°C
Resistenza vasca Tank element Puissance résistance cuve Heizleistung Wanne Potencia resistencia cuba	W 2200	Durata ciclo Cycle time Durée du cycle Spülzyklusdauer Duración ciclo	120/240 sec.	Livello rumorosità Noise emission Émission sonore Arbeitsplatzbezogener emissionswert Emisión de ruidos	< 62 dBA
Potenza massima assorbita Total power rating Puissance maximale Max Stromaufnahme Potencia máxima	W 3750	Cicli ora Cycles/hour up to Cycles par heure Körbe pro Stunde Ciclos/h	30/15	Peso netto Net Weight Poids net Netto Gewicht Peso neto	Kg 50